


# WISI GT 21 W

Tangram Modul IP in 6x PAL/SECAM/NTSC

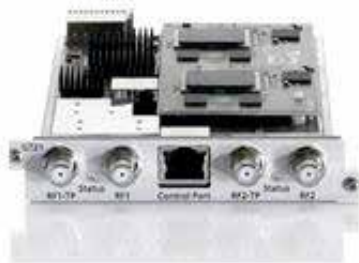

## Description

The GT 21 W module is part of the Tangram product portfolio. The GT 21 W module allows you to add up to 6 services in PAL / SECAM format per module to your network. Tangram is a very high density and highly flexible solution for all kinds of networks. The WISI Tangram chassis uses a fully redundant concept (n+1, 1+1).

## At a glance:

- High quality IP to analogue PAL/SECAM/NTSC modulation
- Up to 6 analogue channels on 2 RF outputs
- Outstanding signal parameters by direct digital modulation
- HD to SD downscaling functionality
- MPEG-2 H.262 and MPEG-4 H.264 decoding (SD & HD)
- For measurement / monitoring test ports of the output signal
- Temperature and output level monitoring
- RTP/ IP input streaming with FEC error correction

Technical data	
<b>Streaming-Input</b>	
IP-Inputs	32 pcs.
IP-Compliance	ISO/IEC 13818
IP-Input bitrate	Max. 425 Mbit/s per IPTS, Max. 850 Mbit/s total
IP-Input protocol	UDP/RTP/RTP+FEC Unicast and Multicast, IGMP v2 and v3
IP-TS-Input format	SPTS CBR/VBR, MPTS CBR
IP-FEC Inputs	Yes, with GTFEC License
IP-FEC Compliance	SMPTE 2022-1, SMPTE 2022-2
IP-Packet format	MPEG over UDP/IP and RTP/IP
IP-Packet size	188 Byte
IP-PCR restamping	Yes
IP-Dejittering	Yes, per default 100ms, individual adjustable
<b>video processing</b>	
Video decoder	6x MPEG-2 SD (MP@ML) 1,5..15 MBit/s or 6x MPEG-4 SD (MP@ML) Level 4.1 or 3x MPEG-4 HD (MP@HL) Level 4.1

Technical data	
Video downscaling	3x MPEG-4 HD and 3x MPEG-2 SD concurrent (PAL/SECAM) or 2x MPEG-4 HD and 2x MPEG-2 SD concurrent (PAL-M/NTSC)
Video-Format	4:3/16:9/4:3 Zoom
Video Standard	PAL/SECAM/NTSC
Video scaling	Auto, Ignore, Letterbox, Pan and scan, Combined, Forced
Vertical blanking interval	WST Teletext inserting (lines 7-15, 20-21), VPS inserting (line 16) WSS inserting according to aspect ratio
Subtitle	DVB and Teletext (EBU) EN 300 743
Test lines	Line 17, 18, 330, 331
Test carrier wave	Yes
OSD Video	Yes, text or picture PNG (<400 kB)

## Technical data

OSD Radio	Yes, text or picture PNG (<400 kB)
-----------	------------------------------------

Compliance	ISO 13818-2 (MPEG-2/H.262); ISO 14496-10 (MPEG-4/H.264/AVC)
------------	---

### Video parameters

Differential gain	<1,5 %
-------------------	--------

Differential phase	<1,5 °
--------------------	--------

Group delay time	<50 ns (-0,5...4,43 MHz)
------------------	--------------------------

Static nonlinearity	3 %
---------------------	-----

Video frequency response	±1 dB (10...5 MHz, CCIR 18)
--------------------------	-----------------------------

S/N Video, weighted (CCIRrec. 567-1)	typ. 64 dB (at 1 channel; at 2/3 channels typ. 62 dB)
--------------------------------------	---

2-T Puls K Faktor	K <1,2 %
-------------------	----------

Test picture	Color bars
--------------	------------

### Audio processing

Audio decoder	ISO 13818-3 MPEG-1 (L1/L2) MPEG-2 (L1/L2), Dolby (Dolby and the double-D symbol are trademarks of Dolby Laboratories. Manufactured under license from Dolby Laboratories)
---------------	---

Audi Dolby Decoding	Yes, with GTDOL software option (The Dolby audio decoding functionality requires a TANGRAM GT21W HW that is Dolby enabled. You can check this on the Serial number (S/N: 0462xxxxxxxxxxx Dolby is enabled, S/N: 0460xxxxxxxxxxx Dolby is not enabled). Older TANGRAM GT21W HW versions cannot be upgraded to Dolby capability. Please contact WISI Sales for more information)
---------------------	--

Audio language	ISO 639
----------------	---------

Audio format	Mono/Stereo/Dual NICAM/BTSC/SAP
--------------	---------------------------------

Audio format switching	Manual / auto
------------------------	---------------

### Audio parameters

S/N Audio	75 % (with color testable)
-----------	----------------------------

Standard B/G/D/K/I/N	typ. 64 dB (weighted)
----------------------	-----------------------

Standard NTSC	typ. 64 dB (weighted)
---------------	-----------------------

Standard-L	typ. 48 dB (weighted)
------------	-----------------------

Frequency response	±1 dB (40 Hz...15 kHz)
--------------------	------------------------

### VSB - AM modulation

TV standards	B/G, D/K, I, L, M, N
--------------	----------------------

Channel bandwidth	6/7/8 MHz
-------------------	-----------

Output level (each RF port)	117 dBµV (1 ch), 113 dBµV (2 ch), 111 dBµV (3 ch)
-----------------------------	---

Output level stability	±1 dB
------------------------	-------

Output return loss	≥14 dB (45 MHz) -1,5 dB/Octave
--------------------	--------------------------------

Output level setting	0...30 dB (0,5 dB steps)
----------------------	--------------------------

## Technical data

Spurious (outside TV-Channels)	45...450 MHz, typ. 66 dB; 450...862 MHz, typ. 64 dB
--------------------------------	--

### RF parameters

Output ports	2 pcs.
--------------	--------

Channels per port	up to 3 (PAL-625/SECAM); up to 3 (PAL-M/NTSC); up to 2 (PAL-M/NTSC with BTSC)
-------------------	---

Output impedance	75 Ω
------------------	------

Output frequency	45...862 MHz
------------------	--------------

Output frequency window	34,2 MHz/port
-------------------------	---------------

Output frequency steps	1 kHz
------------------------	-------

Output frequency stability	±10 kHz
----------------------------	---------

### Processing

PCR correction and de-jitter	Yes
------------------------------	-----

Processing bitrate	Max. 1200 Mbps total
--------------------	----------------------

Number of PIDs	Max. 2000 PIDs total
----------------	----------------------

### Connectors

RJ45	1 pcs. (for local management)
------	-------------------------------

F-socket RF- output	4 pcs. (2x RF-Output, 2x Test-Output -20dB ± 1dB)
---------------------	---

### General data

Power consumption	max. ≤26 W
-------------------	------------

Operating temperature range	-5°C...+45°C, 23°F...113°F, (ETSI EN 300 019-1-3 Class 3.1)
-----------------------------	--

Max. humidity (non condensing)	95 %
--------------------------------	------

Electro Magnetic Compatibility (EMC)	EN 50083-2
--------------------------------------	------------

Safety compliance	UL/CSA/CAN 60950-1
-------------------	--------------------

Signalling	Multicolor LEDs (Power on - green, Error - red)
------------	--

Operation mode	PAL-625/SECAM, PAL-M/NTSC, PAL-M/NTSC with BTSC
----------------	--

Hardware revision	1001
-------------------	------

Software version	3.1
------------------	-----

### Packaging data

Sales unit	1 pcs.
------------	--------

Dimensions (WxHxD) sales unit	100 x 20 x 250 mm
-------------------------------	-------------------

Packaging volume sales unit	0,5 dm <sup>3</sup>
-----------------------------	---------------------

Gross weight sales unit	0,33 kg
-------------------------	---------

Shipping unit	1 pcs.
---------------	--------

Dimensions (WxHxD) shipping unit	170 x 75 x 340 mm
----------------------------------	-------------------

Packaging volume shipping package	4,3 dm <sup>3</sup>
-----------------------------------	---------------------

Gross weight shipping unit	0,48 kg
----------------------------	---------

EAN	4010056729776
-----	---------------

Article number	72977
----------------	-------

Customs tariff number	85437090
-----------------------	----------

## WISI Communications GmbH & Co. KG

Wilhelm-Sihn-Str. 5-7  
75223 Niefern - Oeschelbronn, Germany

Phone: +49 7233 66-280, Fax: -350  
E-Mail: export@wisi.de

Technical Modifications reserved. WISI cannot be held liable for any printing error. 12. Dezember 2016, 11:41 vorm.